




FT TYPE Common Mode Choke

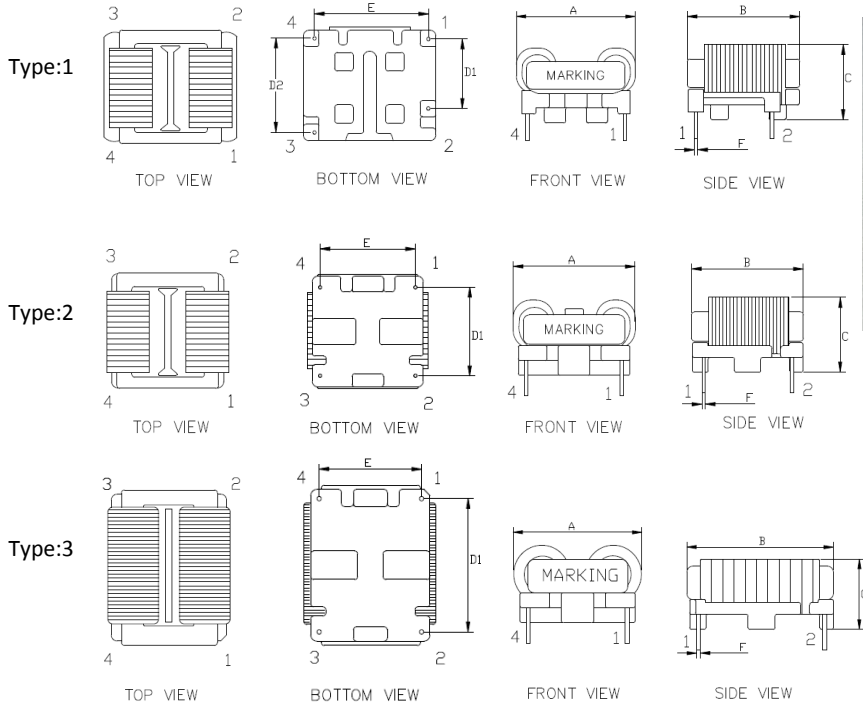

Electrical

- **Rated Voltage:** AC/DC 250V
- **Inductance range:** 5.5~30.0mH $\pm 30\%$
Test Condition: 10KHz 0.3V
- **Operating Temperature Range:** -25~120°C
- **Withstanding Voltage:** AC 2.0KV 60Sec.
(Winding to Winding)
- **Rated current range:** 1.0~5.0A

Features

- Winding directly to the closed magnetic path core.
- Use the flat wire, improving the space factor.
- Single-phase winding, thereby dramatically reduce stray capacitance.
- Achieve a high inductance in both common mode and normal mode.
- Achieve a high magnetic saturation characteristics.
- No layer-short, higher quality.
- High attenuation to the normal mode noise
- Winding automatic

Part No	L(mH) $\pm 30\%$ @10KHz	IDC (A)	Dim A Max mm	Dim B Max mm	Dim C Max mm	Dim D1 ± 0.5 mm	Dim D2 ± 0.5 mm	Dim E ± 0.5 mm	Dim F ± 0.1 mm	Type
FT15-010150H	15.0	1.0								
FT15-010125H	12.5	1.0	20.5	16.5	14.0	9.0	12.9	17.0	0.7	1
FT15-1R5090H	9.0	1.5								
FT19-010280H	28.0	1.0								
FT19-1R5225H	22.5	1.5								
FT19-020140H	14.0	2.0	23.5	21.5	14.0	15.5		17.0	0.7	2
FT19-030095H	9.5	3.0								
FT19-3R5070H	7.0	3.5								
FT24-020300H	30.0	2.0								
FT24-030205H	20.5	3.0								
FT24-3R5150H	15.0	3.5	23.0	25.5	14.0	21.5		17.0	0.7	3
FT24-050055H	5.5	5.0								