




Iron Core

Choke

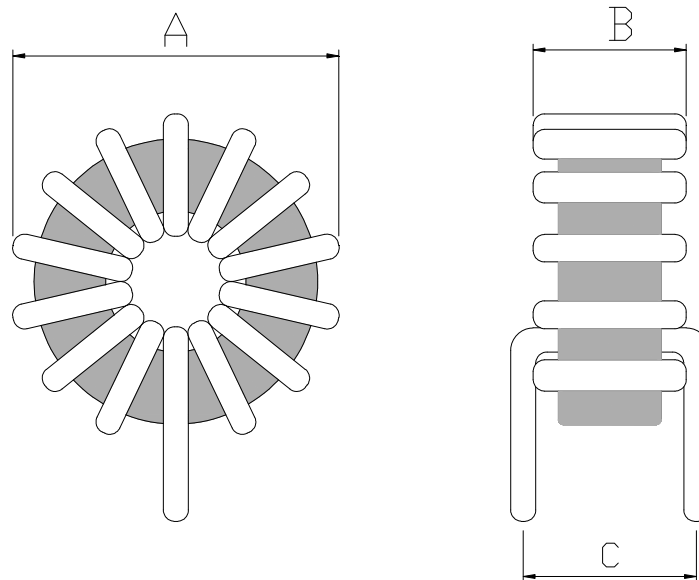

規格	A (mm)	B (mm)	C (mm)	電感(uH)	DCR(mΩ)	耐電流(A)
T44-52	12.5~13.3	5.2~6.1	5.7~6.9	26.9~11.6	44.4~17.9	1.0~2.0
T50-26	14.3~15.1	7.8~8.7	7.9~8.4	49.3~17.6	59.9~17.8	1.5~2.0
T50-52	14.4~15.5	7.9~8.7	8.2~9.9	44.7~20.1	59.3~18.2	1.5~2.0
T60-26	17.1~18.1	13.5~14.4	14~14.5	96.7~42.0	96.5~23.3	2.0~2.5
T60-52	16.8~17.6	7.2~7.6	7.9~8.1	69.3~33.7	71.0~23.5	1.5~2.0
T68-26A	19.9~20.2	7.0~8.7	8.0~9.5	36.2~33.2	26.0~14.4	2.0~2.5
T68-52	20.0~20.4	8.5~8.6	8.6~8.7	36.9~23.3	26.6~14.5	2.0~2.5
T80-26	23.0~23.1	8.6~8.8	9.5~10.2	65.7~49.8	35.0~22.5	1.5~2.0
T80-52	22.8~23.3	8.5~9.1	9.0~9.7	57.0~42.9	34.5~21.3	2.0~2.5
T90-26	25.5~26.0	11.6~12.1	11.3~12.3	115.4~90.1	50.5~28.9	1.5~2.0
T90-52	25.8~26.9	11.9~12.1	12.4~12.5	120.5~65.0	54.3~25.7	2.0~2.5
T94-18	26.6~27.0	10.1~10.5	10.9~11.2	77.3~46.7	46.3~25.5	2.5~3.0
T106-18	29.9~30.3	13.3~13.6	15.1~15.4	145.0~103.0	66.2~36.5	3.0~3.5
T106-52	29.4~29.9	16.9~17.1	18.1~17.2	203.0~162.0	65.1~39.9	2.0~2.5